

... , *papayian@civil.auth.gr*

... , *elan@civil.auth.gr*


... , *papchr@civil.auth.gr*

(CaO) 10%,

8 (2013)

« » 2011-2014

TERNΑ

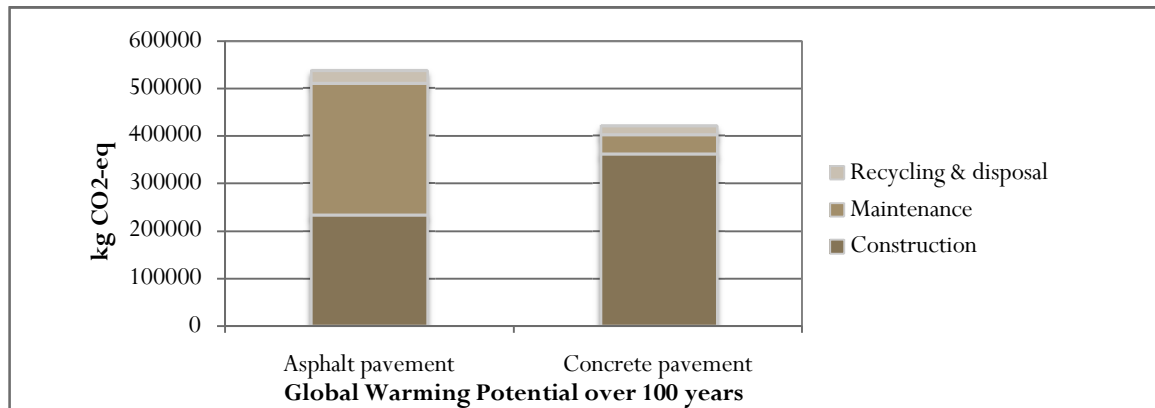

1.

blended type

- 13282 :
- : 50%
- Portland clinker: 25%
- : 12,5%
- : 12,5%

28 40 MPa.

- f_{ck} : C25/30
 -Max Vebe (ACI 325 10R-95)
 Vebe 20-40 sec
 - $\leq 300 \text{ kg/m}^3$
 - / $\leq 0,50$
 - max 31,5 16 mm

1 \varnothing
 (30 min).

1.

	A1	A2	A3	A4	B1	B2	B3	B4
(kg/m^3)	280	280	280	280	300	270	280	280
(kg/m^3)	153	153	196	163	120	135	150	148
(kg/m^3)	1096	1096	1096	1096	1096	1096	1096	1096
(kg/m^3)	897	897	897	897	897	897	897	897
(mm)	16	16	16	16	31.5	31.5	31.5	31.5
(% .)	0.0%	1.0%	1.0%	0.0%	1.0%	1.0%	1.0%	0.5%
/	0.54	0.54	0.70	0.58	0.40	0.50	0.54	0.53
Vebe (s)	-	-	20	60	8	9	60	35
Vebe (kg/m^3)	2427	2396	2428	2410	2396	-	2389	2404

paver

paver,
 rollers,



1.

).
:

	2.	3		
(6)	1	2	3
u (m/sec)		4625	5022	4713
(kg/m ³)		2295	2394	2345
f _c (MPa)		25.0	32.0	31.8

BSI group (2015), δHydraulic road binders. Conformity evaluation (BS-EN 13282)ö, UK.
ACI (1995), δReport on Roller-Compacted Concrete Pavements (ACI 325.10R-95)ö, American
Concrete Institute, January 1995 , USA